

1	Main mix insert return L	5	Channel 1 alt input
2	Main mix insert return R	6	Channel 2 alt input
3	Channel 1 insert return	7	Not used
4	Channel 2 insert return	8	Not used

1	Main mix insert send L	5	Main mix output L
2	Main mix insert send R	6	Main mix output R
3	Channel 1 insert send	7	Mon output L
4	Channel 2 insert send	8	Mon output R

MIX BUS OUTPUTS


Balanced outputs for main mix bus and mix bus B.

IN/RETURN DB25

Six balanced inputs for mix bus and channel insert points, as well as channel alternate inputs.

OUT/SEND DB25

Eight balanced outputs for mix bus and channel insert points, as well as duplicate main mix and monitor outputs.

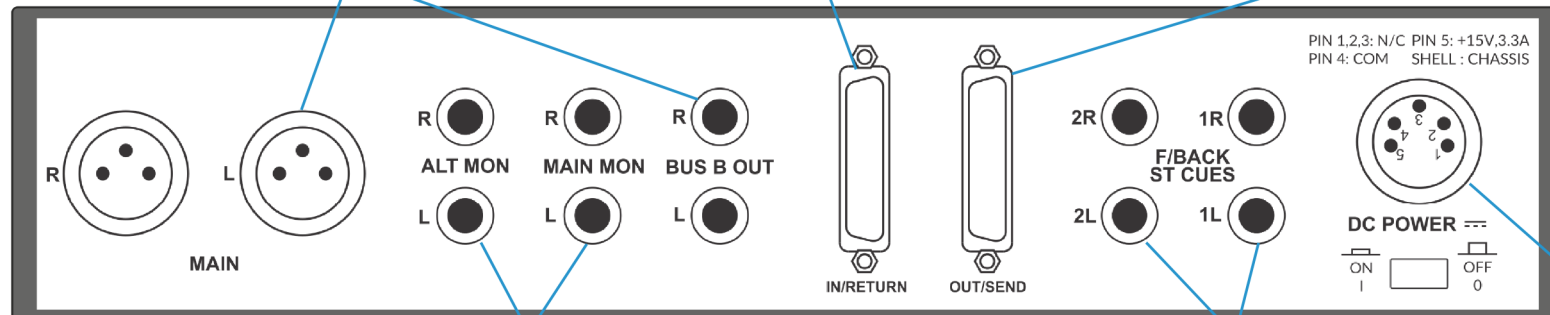

MONITOR OUTPUTS

Balanced TRS outputs for main and alternate monitor sets, with rail-ramp technology to minimise thumps on power up/ power down.

FOLDBACK OUTPUTS

Balanced TRS outputs for foldback outputs 1 and 2. These can be used for headphone and monitor mixes, or as cue send outputs to external outboard processors.

POWER

Five pin locking power input connector.